
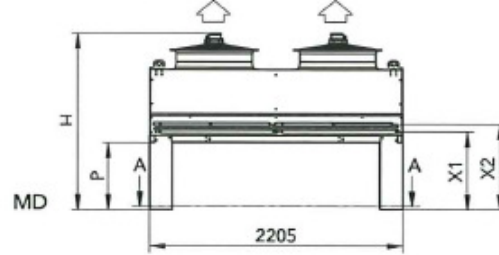
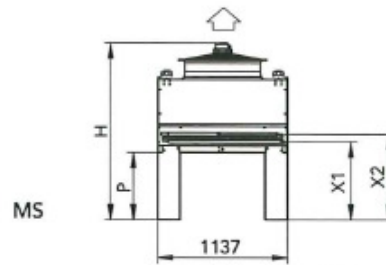
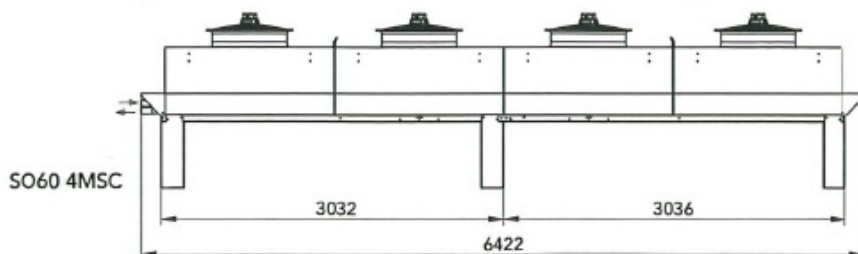
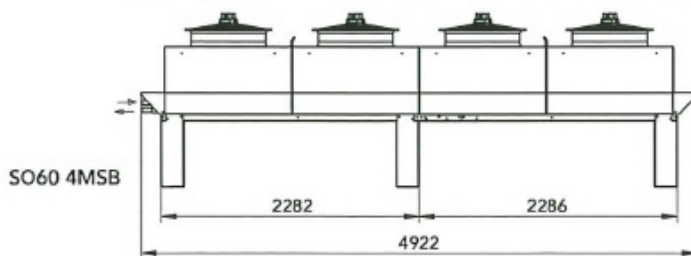
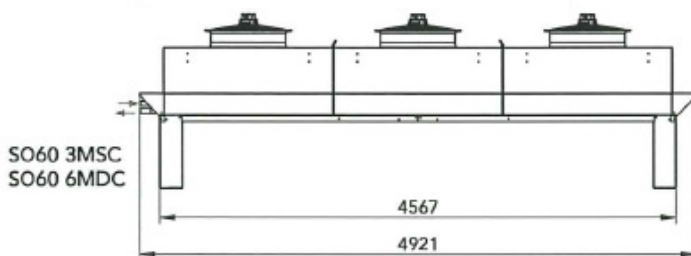
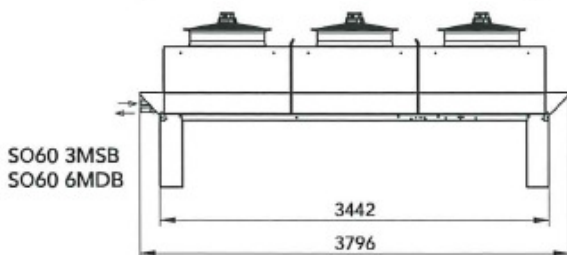
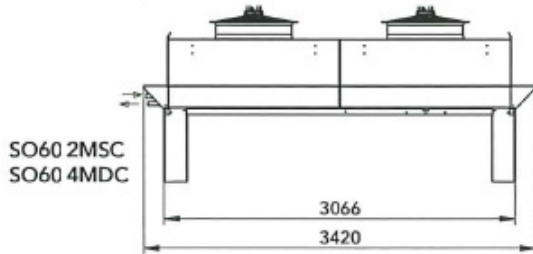
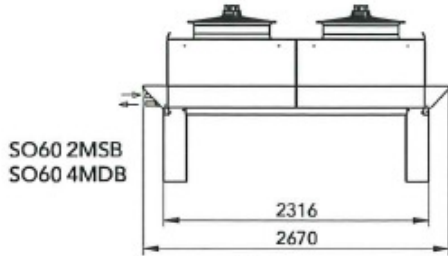
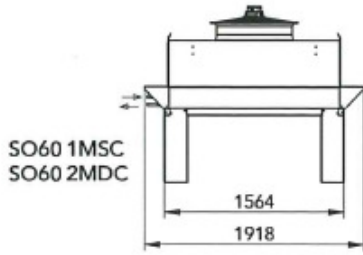


**SO60 single-row, Refrigerating capacity at  $T_{\text{cond}} = 40\text{ }^{\circ}\text{C}$ ,  $\Delta T = 15\text{ K}$**


Condenser-model	Refrigerating capacity [kW]	Engine speed	Motor	Sound pressure level [dB(A)] in 10 m	Weight [Kg]	
<b>1 MSB – 4 MSC</b>	39	6PL	1	43	141	
	45	6PH	1	48		
	49	6PL	1	43	163	
	54	6PH	1	48		
	77	6PL	2	46	247	
	89	6PH	2	51		
	99	6PL	2	46	297	
	108	6PH	2	51		
	116	6PL	3	48	351	
	134	6PH	3	53		
	147	6PL	3	48	428	
	161	6PH	3	53		
	154	6PL	4	49	468	
	179	6PH	4	54		
	197	6PL	4	49	526	
	215	6PH	4	54		
	29	8PL	1	35	141	
	34	8PH	1	40		
	36	8PL	1	35	163	
	43	8PH	1	40		
	58	8PL	2	38	247	
	69	8PH	2	43		
	73	8PL	2	38	297	
	87	8PH	2	43		
	86	8PL	3	40	351	
	103	8PH	3	45		
	108	8PL	3	40	428	
	130	8PH	3	45		
	115	8PL	4	41	468	
137	8PH	4	46			
145	8PL	4	41	526		
173	8PH	4	46			
20	12PL	1	24	141		
24	12PH	1	28			
24	12PL	1	24	163		
30	12PH	1	28			
40	12PL	2	27	247		
48	12PH	2	31			
49	12PL	2	27	297		
61	12PH	2	31			
60	12PL	3	29	351		
71	12PH	3	33			
73	12PL	3	29	428		
91	12PH	3	33			
80	12PL	4	30	468		
95	12PH	4	34			
97	12PL	4	30	526		
121	12PH	4	34			

**SO60 two-rowed, Refrigerating capacity at  $T_{\text{cond}} = 40 \text{ }^{\circ}\text{C}$ ,  $\Delta T = 15 \text{ K}$**

Condenser-model	Refrigerating capacity [kW]	Engine speed	Motor	Sound pressure level [dB(A)] in 10 m	Weight [Kg]	
<b>2 MDB – 6 MDC</b>	77	6PL	2	38	243	
	90	6PH	2	43		
	99	6PL	2	38	283	
	108	6PH	2	43		
	155	6PL	4	41	438	
	179	6PH	4	46		
	197	6PL	4	41	523	
	215	6PH	4	46		
	231	6PL	6	43	630	
	268	6PH	6	48		
	295	6PL	6	43	760	
	322	6PH	6	48		
	58	8PL	2	38	243	
	69	8PH	2	43		
	73	8PL	2	38	283	
	87	8PH	2	43		
	115	8PL	4	41	438	
	137	8PH	4	46		
	145	8PL	4	41	523	
	173	8PH	4	46		
	172	8PL	6	43	630	
	205	8PH	6	48		
	217	8PL	6	43	760	
	259	8PH	6	48		
	40	12PL	2	27	243	
	48	12PH	2	31		
	49	12PL	2	27	283	
	61	12PH	2	31		
	80	12PL	4	30	438	
	95	12PH	4	34		
97	12PL	4	30	523		
121	12PH	4	34			
129	12PL	6	32	630		
142	12PH	6	36			
146	12PL	6	32	760		
181	12PH	6	36			



SECTION A-A



4 trous Ø16,5  
4 holes Ø16.5

DETAIL B

	Hauteur Pieds Legs height	H	P	X1	X2
Pieds standard Standard feet	590	1546	588	684	750
Pieds surélevés Long feet	820	1776	818	914	980
Pieds surélevés Long feet	1225	2181	1223	1319	1385

Les dimensions sont données en mm avec une tolérance de ±10mm.  
Dimension data are given in mm with ±10mm tolerance.